

**isc Silicon NPN Power Transistor**

**BDY73**

**DESCRIPTION**

- Excellent Safe Operating Area
- DC Current Gain- $h_{FE}=50-150@I_C = 4A$
- Collector-Emitter Saturation Voltage-  
:  $V_{CE(sat)}= 1.1 V(Max)@ I_C = 4A$

**APPLICATIONS**



- Designed for general-purpose switching and amplifier applications

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^{\circ}C$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	100	V
$V_{CER}$	Collector-Emitter Voltage	70	V
$V_{CEO}$	Collector-Emitter Voltage	60	V
$V_{EBO}$	Emitter-Base Voltage		V
$I_C$	Collector Current-Continuous	15	A
$I_B$	Base Current	7	A
$P_C$	Collector Power Dissipation@ $T_C=25^{\circ}C$	117	W
$T_J$	Junction Temperature	200	$^{\circ}C$
$T_{stg}$	Storage Temperature	-65~200	$^{\circ}C$

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance,Junction to Case	1.5	$^{\circ}C/W$

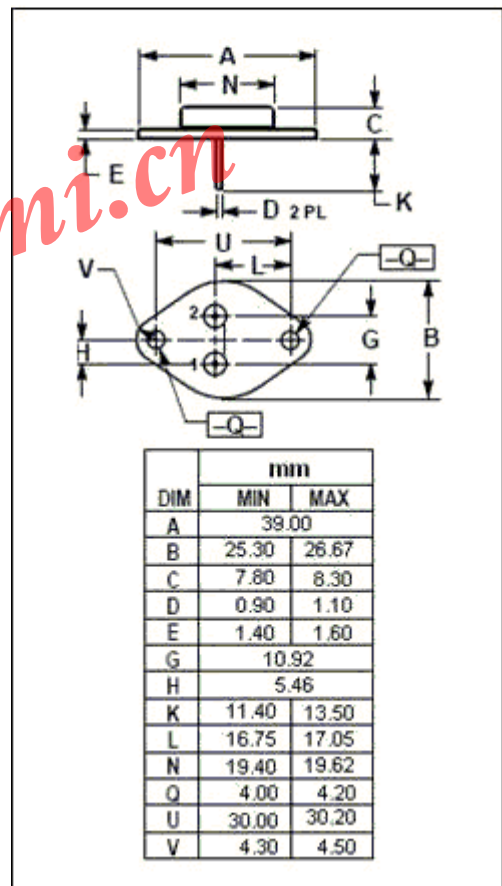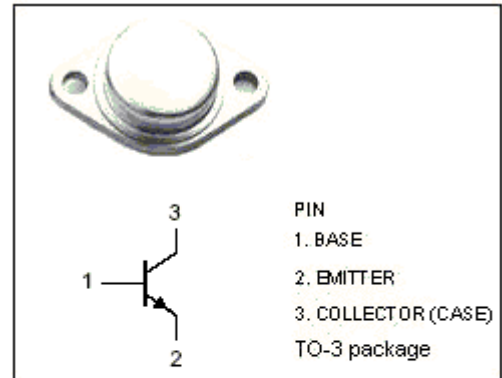

## isc Silicon NPN Power Transistors

## BDY73

## ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=200\text{mA}; I_B=0$	60		V
$V_{CER(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=200\text{mA}; R_{BE}=100\Omega$	70		V
$V_{CEX(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=100\text{mA}; V_{BE}=-1.5\text{V}$	90		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=4\text{A}; I_B=0.4\text{A}$		1.1	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=4\text{A}; V_{CE}=4\text{V}$		1.8	V
$I_{CEO}$	Collector Cutoff Current	$V_{CE}=30\text{V}; I_B=0$		0.7	mA
$I_{CEX}$	Collector Cutoff Current	$V_{CE}=100\text{V}; V_{BE(off)}=1.5\text{V}$ $V_{CE}=100\text{V}; V_{BE(off)}=1.5\text{V}; T_C=150^{\circ}\text{C}$		1.0 5.0	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=7.0\text{V}; I_C=0$		5.0	mA
$h_{FE}$	DC Current Gain	$I_C=4\text{A}; V_{CE}=4\text{V}$	50	150	
$I_{s/b}$	Second Breakdown Collector Current with Base Forward Biased	$V_{CE}=60\text{V}; t=1.0\text{s}$ , Nonrepetitive	1.95		A
$f_T$	Current Gain-Bandwidth Product	$I_C=1\text{A}; V_{CE}=4\text{V}$	0.8		MHz